



# O-TECH

<http://www.fengkeh.com>

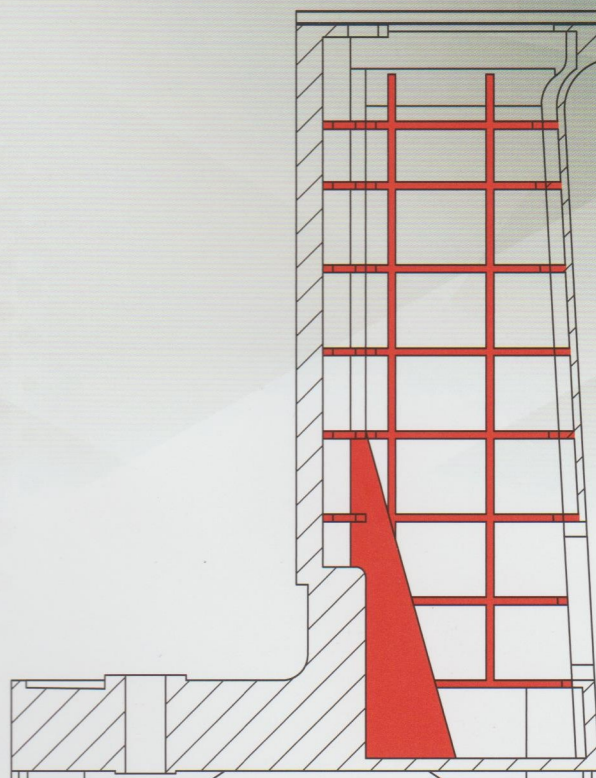

Ribs: 15mm

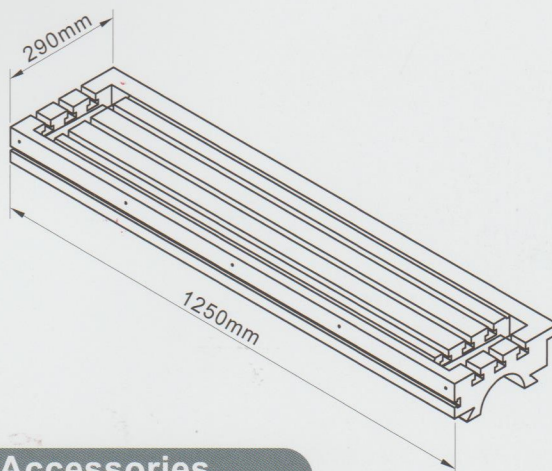

## 標準配件

- 工具箱
- LED工作燈
- 手動拉桿
- X軸伺服馬達自動進給
- Y軸伺服馬達自動進給
- 主軸百分錶座
- Y軸前伸縮護罩

## Standard Accessories

- Toll box
- LED Working light
- Draw bar. (manual)
- X Axis server motor automatic feed
- Y Axis server motor automatic feed
- Spindle Indicator
- Trackable chip cover on Y axis


## 特殊配件

- 光學尺
- 氣動拉桿
- 冷卻系統含水盤

## Optional Accessories

- DRO
- Draw bar. (pneumatic)
- Coolant system with chip tray

## OT-750VS-2

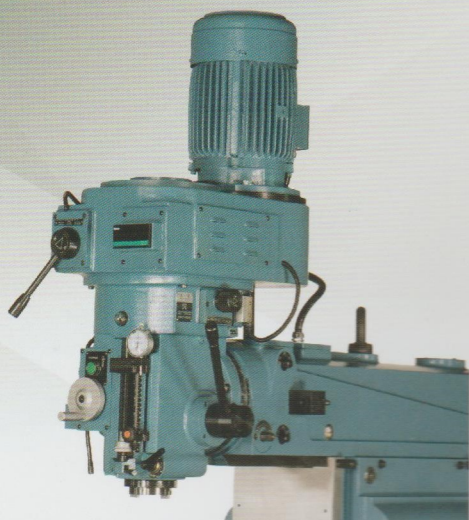


### 無段變速銑頭

- 60~4000RPM
- NT #40主軸
- 工作台 1250x290mm
- 5HP 強力馬達

### Variable speed

- 60~4000RPM
- NT #40 main spindle
- Table 1250x290mm
- 5HP Motor

## OT-750V-2

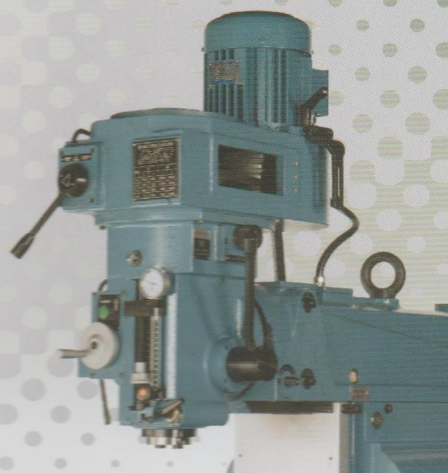

### 16 段變速銑頭

- 75~3600RPM
- NT #40主軸
- 工作台 1250x290mm
- 5HP 強力馬達

### 16 speed

- 75~3600RPM
- NT #40 main spindle
- Table 1250x290mm
- 5HP Motor

|                                        | 機械規格          | Specification                                | OT-750VS-2              | OT-750V-2               |
|----------------------------------------|---------------|----------------------------------------------|-------------------------|-------------------------|
| 主軸<br>Main Spindle                     | 迴轉速度          | Spindle speed                                | 60~4000rpm 無段變速         | 75~3600rpm 16段變速        |
|                                        | 端孔斜度          | Spindle taper                                | NT #40                  | NT #40                  |
|                                        | 左右傾斜角度        | Swivel angle of head                         | 45° (L&R)               | 45° (L&R)               |
|                                        | 伸出臂行程         | Overarm travel                               | 550mm                   | 550mm                   |
|                                        | 升降套行程         | Quill travel                                 | 140mm                   | 140mm                   |
|                                        | 主軸端至工作台面距離    | Distance of spindle to table                 | 0~520mm                 | 0~520mm                 |
|                                        | 主軸中心至機身距離     | Distance of spindle center to column surface | 140~750mm               | 140~750mm               |
|                                        | 主軸自動押送速度      | Quill feed per revolution of spindle         | 0.035/0.07/0.14mm(每轉一圈) | 0.035/0.07/0.14mm(每轉一圈) |
| 工作台<br>Table                           | 工作台尺寸 (長x寬)   | Working table area (LxW)                     | 1250x290mm              | 1250x290mm              |
|                                        | 左右行程          | Longitudinal travel manual/auto              | 750mm                   | 750mm                   |
|                                        | 前後行程          | Cross travel                                 | 400mm                   | 400mm                   |
|                                        | 升降行程          | Vertical travel of knee                      | 400mm                   | 400mm                   |
|                                        | T型槽 (寬x槽數x間距) | T-slots                                      | 16x3x63.5mm             | 16x3x63.5mm             |
|                                        | 左右自動押送速度      | Cutting federate (X)                         | 0~1500mm / min          | 0~1500mm / min          |
|                                        | 左右快速押送速度      | Rapid traverse (X)                           | 3000mm / min            | 3000mm / min            |
|                                        | 升降快速押送        | Table elevating speed                        | 1150mm / min            | 1150mm / min            |
| 電動機<br>Motor                           | 主軸            | Main Spindle                                 | 3.7kw (5HP)AC變頻馬達       | 3.7kw (5HP)             |
|                                        | 升降座           | Table elevating                              | 0.75kw (1HP)            | 0.75kw (1HP)            |
|                                        | 潤滑泵浦          | Lubricating pump                             | 150w                    | 150w                    |
|                                        | 電磁泵浦          | Electromagnetic pump                         | 40w                     | 40w                     |
| 機械重量及包裝<br>Machine Weight<br>& Packing | 外觀尺寸          | Machine measurement (LxWxH)                  | 2100x1850x2473.5mm      | 2100x1850x2453.5mm      |
|                                        | 裝箱尺寸          | Packing measurement (LxWxH)                  | 2270x1850x2200mm        | 2270x1850x2200mm        |
|                                        | 淨重            | Net weight                                   | 1985kgs                 | 1961kgs                 |
|                                        | 毛重            | Gross weight                                 | 2135kgs                 | 2111kgs                 |

\* 本公司對產品隨時在進行研究改進，絕對保有隨時更改設計、規格、尺寸及機械結構之權力。

\* All specification, and design characteristics shown in this catalogue are subject to change without notice.